


# FLANGED BAR STOCK THERMOWELLS

with parallel stem

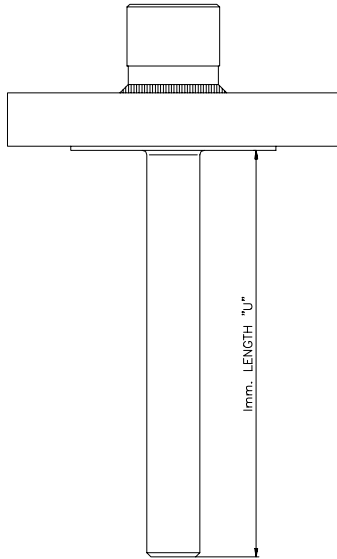

## Specifications:

Series	:	TWE-13.000
Type	:	straight, from bar stock, flange welded on both sides to thermowell (un-machined)
Material	:	SS 304 or SS 316
Internal thread	:	1/2" NPT
Flange size, rating and material	:	to be specified
Bar stock diameter	:	32 mm
Stem diameter	:	19 mm <sup>+0,5</sup> <sub>-0</sub>
Surface finish	:	1 µm (40 Ru)
Bore	:	7 mm or 10 mm <sup>+0,1</sup> <sub>-0,1</sub>
Eccentricity	:	10% of wall thickness max.
Tip thickness	:	4 mm <sup>+1,5</sup> <sub>-0</sub>
Immersion length 'U'	:	to be specified; replace box in ordering code with your required length
Total well length	:	'U' plus 50 mm

Test wells can be supplied with brass or stainless steel plug and chain; please specify when ordering.

## Ordering code:

### Bore ø

7 mm  
10 mm

### SS 304

'U' Flange  
TWE-13701 -  mm-  
TWE-13011 -  mm-

### SS 316

'U' Flange  
TWE-13702 -  mm-  
TWE-13012 -  mm-



Thermo Electric  
P.O. Box 179  
2740 AD Waddinxveen  
The Netherlands

Tel. : +31 (0)182 – 302 850  
Fax : +31 (0)182 – 302 777  
E-mail : info@thermo-electric.nl  
Internet: http://www.thermo-electric.nl

A/420  
Rev.00 08/03