


# SPRINGLOADED THERMOCOUPLES

with adjustable bayonet cap

## Specifications:

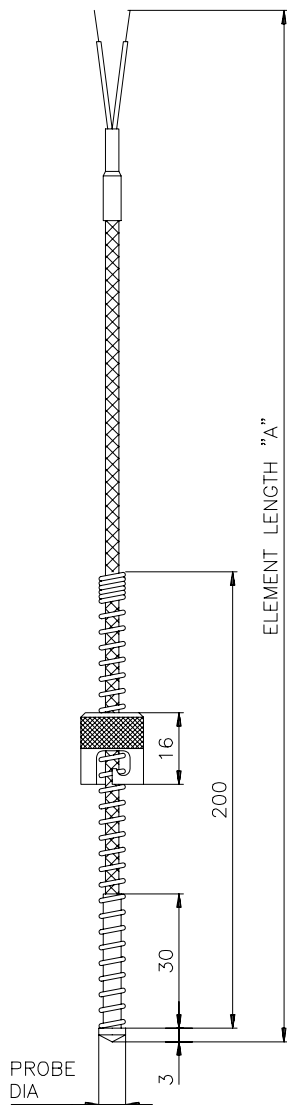

Probe type	:	single or duplex springloaded thermocouple with fast response tip
Installation	:	by bayonet cap on mounting adapter
Thermocouple type	:	iron-constantan, type L (DIN 43710)
Spring material	:	stainless steel
Cap material	:	chrome plated steel
Probe diameter	:	6 or 8 mm
Hot junction	:	grounded
Max. probe temperature	:	400°C
Immersion length	:	adjustable over 0 - 150 mm
End termination	:	bare ends
Wire type	:	glass fibre insulated with galvanized steel braid
Element length 'A'	:	to be specified; replace box in ordering code with your required length; our standard length is 3000 mm
Mounting adapters to be ordered separately, see datasheet B/530		

Type 'A' for 6 mm probe diameter

Type 'B' for 8 mm probe diameter

## Ordering code:

### Probe diameter

6 mm  
8 mm

### Single

'A'  
MTS-62521 - □ mm  
MTS-63521 - □ mm

### Duplex

'A'  
MTS-62621 - □ mm  
MTS-63621 - □ mm

□ = element length 'A' in mm (to be specified)



**Thermo Electric**  
P.O. Box 179  
2740 AD Waddinxveen  
The Netherlands

Tel. : +31 (0)182 – 302 850  
Fax : +31 (0)182 – 302 777  
E-mail : info@thermo-electric.nl  
Internet : http://www.thermo-electric.nl

**B/520**  
**Rev.00 08/03**