


SPRINGLOADED RESISTANCE ELEMENTS

with adjustable bayonet cap

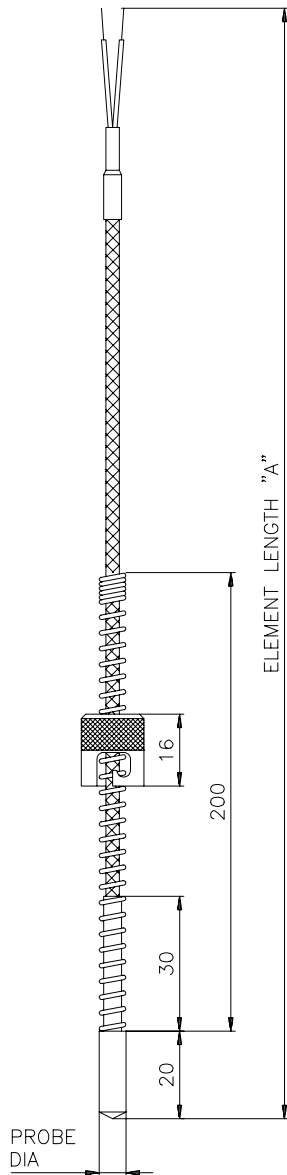

Specifications:

- Probe type : single or duplex springloaded resistance element with fast response tip
- Installation : by bayonet cap on mounting adapter
- Resistance type : Pt100, IEC 751, class B, 2-wire system
- Spring material : stainless steel
- Cap material : chrome plated steel
- Probe diameter : 6 or 8 mm
- Max. probe temperature : 300°C
- Immersion length : adjustable over 0 - 150 mm
- End termination : bare ends
- Wire type : glass fibre insulated with galvanized steel braid
- Element length 'A' : to be specified; replace box in ordering code with your required length; our standard length is 3000 mm
- Mounting adapters to be ordered separately, see datasheet B/530

Type 'A' for 6 mm probe diameter

Type 'B' for 8 mm probe diameter

Ordering code:

Probe diameter

6 mm
8 mm

Single

'A'
MTS-67521-□ mm
MTS-68521-□ mm

Duplex

'A'
MTS-67621-□ mm
MTS-68621-□ mm

□ = element length 'A' in mm (to be specified)



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 850
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet : http://www.thermo-electric.nl

B/525
Rev.00 08/03