


# TWEENER THERMOMETER

-200 °C to +962 °C

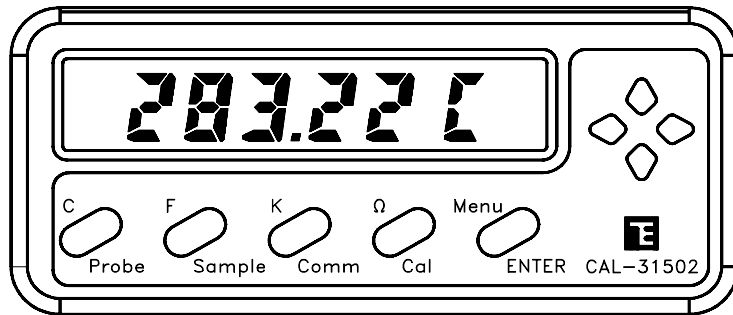

## Features:

- Rugged reliable construction
- Newest thermometer electronics
- Front panel programmable
- RS-232 included, IEEE and software available
- Certified accuracy
- °C, °F, K or Ω
- Ideal for field use or satellite calibration laboratories

## Specifications:

Model	: CAL-1502
Temperature range	: -200 °C to +962 °C (-328 °F to +1764 °F)
Resistance range	: 0 Ω to 400 Ω auto ranging
Excitation current	: 0,5 and 1 mA (user selectable) 4 Hz
Accuracy	: -200 to +100 °C : 0,015 °C +100 to +400 °C : 0,03 °C +400 to +800 °C : 0,06 °C +800 to +962 °C : 0,08 °C
Temperature resolution	: 0,001°
Resistance resolution	: 0,0001 Ω
Temperature coefficient per year	: < 2 ppm/°C typical
Display	: 8 digit, 7 segment 12,7 mm high LED, °C, °F, K or Ohm
Sample rate	: 1 per sec.
Sensor type	: 25 Ω to 100 Ω Pt, RTD, any alpha, SPRT's
Programming	: via front panel key strokes
Probe curve	: programmable in indicator
Temperature scale	: select read-out according to IPTS-68, ITS-90 or Callendar-Van Dusen
Filter	: programmable digital filter, exponential, 0 to 60 seconds time constant
RS-232 interface	: included; 1200, 2400, 4800 and 9600 baud
Battery back-up	: saves calibration and probe constants during power-off
Operating range	: 0 °C to +55 °C
Recommended operating range	: 13 to 33 °C
Power supply	: 90 to 130 V AC or 180 to 260 V AC, 50/60 Hz (please specify)
Probe connection	: 5-pin DIN plugs, 1 included with meter, spares available
Dimensions	: 141 x 58 x 178 mm (W x H x D)
Weight	: 1 kg

## Ordering code:

CAL - 1502 - communications

RS = with RS 232 serial comm.  
IE = with IEEE-488 comm.

All standard preset for RTD as per IEC-751 and including TE certificate; RVA certificate at request

**ACCESSORIES:** see reverse side



Thermo Electric  
P.O. Box 179  
2740 AD Waddinxveen  
The Netherlands

Tel. : +31 (0)182 – 302 850  
Fax : +31 (0)182 – 302 777  
E-mail : info@thermo-electric.nl  
Internet : http://www.thermo-electric.nl

J/250  
Rev.00 08/03