


CODE KEY

thermocouple extension wire

Example:

<u>P</u>	<u>/ AL</u>	<u>P</u>	<u>W</u>	<u>P</u>	<u>TW</u>	<u>- 16</u>	<u>- KX</u>
1	2	3	4	5	6	7	8

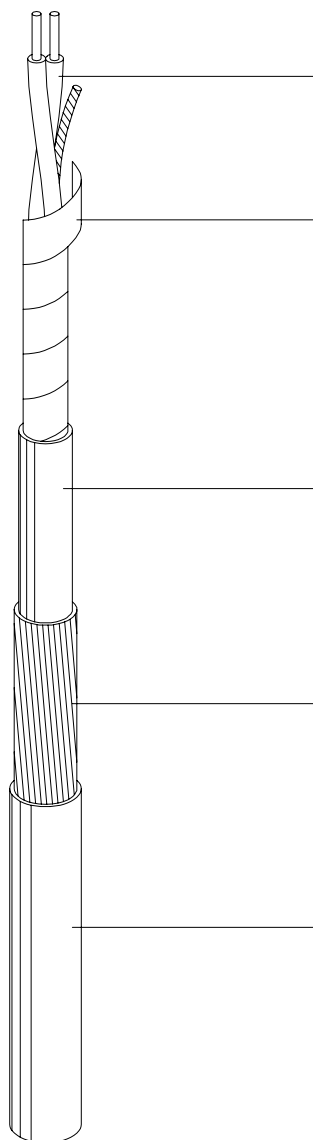

- 1 Conductor insulation PVC
- 2 Overall shield + drain wire
- 3 PVC inner jacket (optional)
- 4 Galvanized steel wire armour
- 5 PVC outer jacket
- 6 Twisted conductors
- 7 Conductor size in AWG
- 8 Chromel-alumel conductors



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 850
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet: <http://www.thermo-electric.nl>

F/001
Rev.00 08/03