


THERMOCOUPLE EXTENSION CABLE

PVC insulated, twisted and overall shielded; 105°C, UL Listed

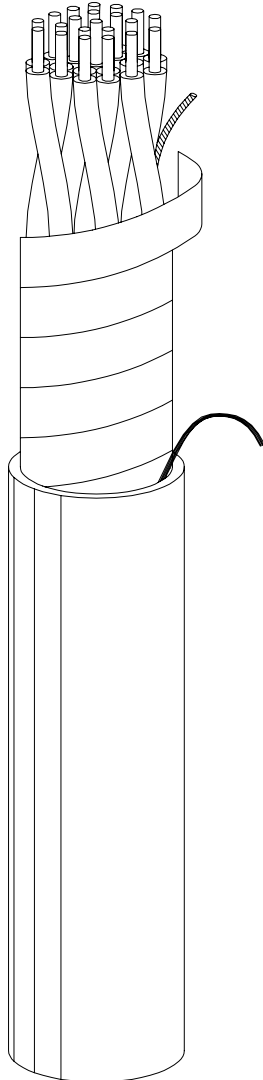

Specifications:

Construction

Conductors	:	0,8 mm ² (20 AWG) solid, thermocouple extension grade according to ITS 1990
Insulation	:	105° PVC, 0,4 mm nominal
Construction	:	twisted pairs
Lay of twist	:	35 to 60 mm staggered
Communication wire	:	0,35 mm ² (22 AWG), 7 strands copper, PVC insulated
Cable shield	:	0,05 mm polyester-backed aluminium tape and 0,05 mm polyester separation tape, 100% coverage and 35% overlap
Cable drain wire	:	0,56 mm ² (20 AWG), 7 strands, tinned copper
Jacket	:	90°C PVC
Group identification	:	each pair numbered
Limits of error	:	according to ANSI MC 96.1/IEC-584
Colour code	:	according to IEC 584

Calibration

Iron-constantan	JX
Chromel-alumel	KX
Copper-constantan	TX
Nisil-nicrosil	NX

Electrical/Physical

Insulation passes 3000 V AC spark test.

Completed construction passes a dielectric test of 2500 V AC for 10 sec (conductor to conductor and conductor to shield).

Nom. loop resistance (JX, KX and TX)	:	resp. 117, 193 and 97,8 Ohm/100 m
Capacitance (conductor to conductor)	:	102 nF/km nominal
Inductance	:	less than 1 mH/km
Circuit voltage rating	:	300 V max.
Operation temperature (max.)	:	insulation 105°C, jacket 90°C
Lower flexibility limit	:	-15°C
Flame test	:	flame retardant as per IPCEA S-61-402
Number of pairs	:	:2,4,8,12,and 24, other pairs on request.
Other colour code on request (ANSI MC-96.1)	:	

Ordering code:

Iron-constantan	:	UP/ALPTwK - □ - 20 - JX IEC
Chromel-alumel	:	UP/ALPTwK - □ - 20 - KX IEC
Copper-constantan	:	UP/ALPTwK - □ - 20 - TX IEC
Nisil-nicrosil	:	UP/ALPTwK - □ - 20 - NX IEC

Select number of pairs.



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 - 302 850
Fax : +31 (0)182 - 302 777
E-mail : info@thermo-electric.nl
Internet: <http://www.thermo-electric.nl>

F/3.150
Rev.00 08/03