


INSTRUMENT CABLE (UL)

PVC insulated, individual and overall shielded, armoured; 105 °C

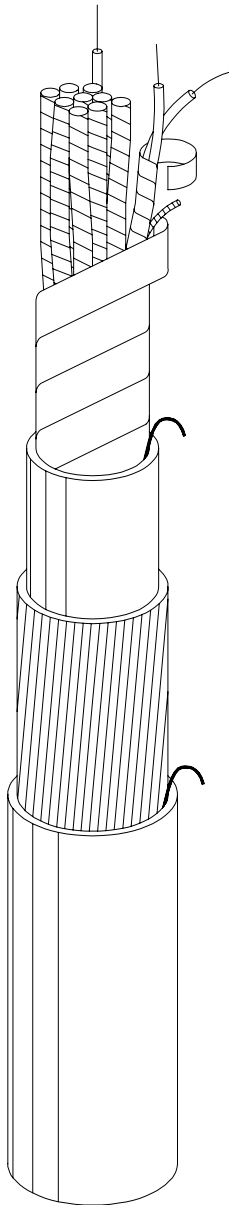

Features:

- Flame retardant and not-propagating
- NEC art. 725, Class 2 & 3 electrical circuits and Class 1 Division 2 hazardous locations
- Resistant to acids, alkalis, oils, weather and sunlight

Applications:

- Suitable for direct burial applications
- Suitable for suspension and vertical drop applications

Specifications:

Construction

Conductors	:	0,56 mm ² (20 AWG) 7 strands, high conductivity bare copper wire, class B
Insulation	:	105° PVC, 0,4 mm nominal
Construction	:	twisted, pairs or triads
Lay of twist	:	50 mm nominal
Communication wire	:	0,035 mm polyester-backed aluminium tape and 0,025 mm polyester separation tape providing 100% coverage
Drain wire	:	0,35 mm ² (22 AWG), 7 strands tinned copper
Communication wire	:	0,35 mm ² (22 AWG), 7 strands copper, PVC insulated
Cable shield	:	0,05 mm polyester-backed aluminium tape and 0,05 mm polyester separation tape, 100% coverage and 35% overlap
Cable drain wire	:	0,56 mm ² (20 AWG), 7 strands, tinned copper
Inner jacket	:	90°C PVC
Armour	:	galvanized steel wire, 80% coverage
Outer jacket	:	90°C PVC
Group identification	:	each pair or triad numbered
Standard colour code	:	pairs : black, white triads: black, white, red jacket : black

Electrical/Physical

Insulation passes 3000 V AC spark test.

Completed construction passes a dielectric test of 2500 V AC for 10 sec (conductor to conductor and conductor to shield).

Conductor resistance	:	30,6 Ohm/km nominal at 20°C
Capacitance (conductor to conductor)	:	123 nF/km nominal
Inductance	:	less than 1 mH/km
Circuit voltage rating	:	300 V max.
Operation temperature (max.)	:	insulation 105°C, jacket 90°C
Lower flexibility limit	:	-15°C
Flame test	:	flame retardant as per IPCEA S-61-402 and IEEE-383

Option

600 V rating (not UL listed)

Ordering code:

For pairs : UP/ALM/ALPWPTWK - - 20F - BX
For triads : UP/ALM/ALPWPTWK - - 20F - BX triad

Select number of pairs.
Other colour on request.



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 850
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet: <http://www.thermo-electric.nl>

G/5.251
Rev.00 08/03