


TWEENER THERMOMETER

-200 °C to +1200 °C

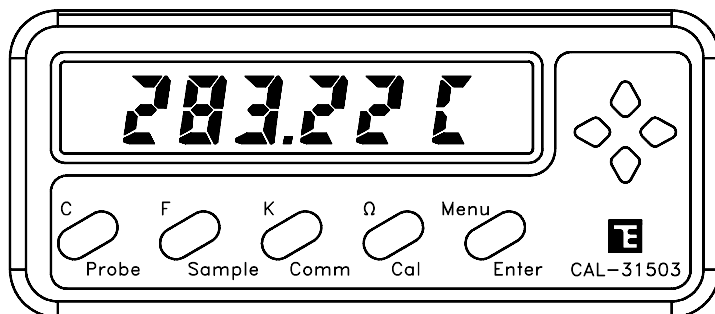

Features:

- Rugged reliable construction
- Newest thermometer electronics
- Front panel programmable
- RS-232 included, IEEE and software available
- Certified accuracy
- °C, °F, K or Ω
- Ideal for field use or satellite calibration laboratories

Specifications:

Model	: CAL-1503
Temperature range	: -200 °C to +1200 °C
Resistance range	: 0 Ω to 25 Ω auto ranging
Excitation current	: 3 and 5 mA (user selectable)
Accuracy	: for 2,5 to 5 Ω nominal R (0,01 °C) for 0,25 Ω nominal R (0,01 °C) -200 to +100 °C : 0,02 °C; +400 to +800 °C : 0,1 °C 0 to 500 °C : 0,25 °C +100 to +400 °C : 0,05 °C; +800 to +1000 °C : 0,125 °C 500 to 1200 °C : 0,3 °C +1000 to +1200 °C : 0,15 °C
Temperature resolution	: 0,01°
Resistance resolution	: 0 to 1 Ω : 0,00001 Ω; 1 to 20 Ω : 0,0001 Ω
Temperature coefficient per year	: < 5 ppm/°C typical
Display	: 8 digit, 7 segment 12,7 mm high LED, °C, °F, K or Ohm
Sample rate	: 1 per sec.
Sensor type	: 0,25 Ω, 2,5 Ω, 3 Ω and 5 Ω PRT
Programming	: via front panel key strokes
Probe curve	: programmable in indicator
Temperature scale	: select read-out according to ITS-90 or Callendar-Van Dusen
Filter	: programmable digital filter, exponential, 0 to 60 seconds time constant
RS-232 interface	: included; 1200, 2400, 4800 and 9600 baud
Battery back-up	: saves calibration and probe constants during power-off
Operating range	: 0 °C to +55 °C
Recommended operating range	: 13 to 33 °C
Power supply	: 100 to 120 V AC or 200 to 240 V AC, 50/60 Hz (please specify)
Probe connection	: 5-pin DIN plugs, 1 included with meter, spares available
Dimensions	: 141 x 58 x 178 mm (W x H x D)
Weight	: 1 kg

Ordering code:

CAL - 1503 - communications

RS = with RS 232 serial comm.

IE = with IEEE-488 comm.

All standard preset for RTD as per IEC-751 and including TE certificate; RVA certificate at request

ACCESSORIES: see reverse side



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 850
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet : <http://www.thermo-electric.nl>

J/251
Rev.00 08/03