


DRY WELL CALIBRATOR

high temperature, 150°C to 1200°C

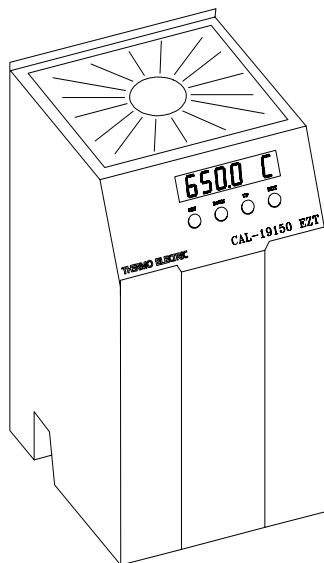

Features:

- Best accuracy in its class
- Front panel recalibration
- No external cooling needed
- Thermal switch test feature
- RS 232 serial interface
- Microprocessor based

Applications:

For quick accurate testing of temperature sensors in laboratories, maintenance, repair or testing facilities.

Specifications:

Model	: CAL-9150
Temperature range	: +150 °C to +1200 °C (302 °F to 2192°C)
Display resolution	: 0,1 °C or °F to 999,9°, above 1° resolution
Display	: green LED's, value and °C
Accuracy	: ± 4 °C (7,2 °F)
Stability	: ± 0,3 °C
Uniformity	: ± 0,3 °C well to well (insert C at 1200 °C)
Controller operation	: see reverse side
Heating time	: approx. 35 minutes to maximum
Cooling time	: 140 minutes with block
Stabilization time	: 20 minutes
Insertion length	: 102 mm
Well diameter	: 32 mm
Interface	: serial RS 2323 standard, IEEE optional
Usage position	: vertical
Enclosure	: rugged aluminium
Dimensions	: 305 x 191 x 280 mm (H x W x D)
Power supply	: 115 V AC or 230 V AC ± 10%
Weight	: 13 kg

Ordering code:

CAL - 9150 - communications -

RS = with RS 232 serial comm.

IE = with IEEE-488 comm.

Block A, B or C

ACCESSORIES: see reverse side



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 850
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet : <http://www.thermo-electric.nl>

J/563