


DRY WELL CALIBRATOR


high temperature, 150°C to 1200°C



Dimensions (in mm):



305 x 191 x 280 mm

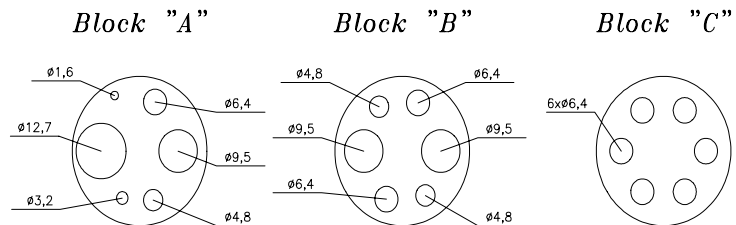

Technical:

Controller operation :

well temperature, reset cut-out, temperature set point, temperature hold mode, ramp and soak programs, secondary menu, heater power, proportional band, cut-out, temperature display hold, controller configuration, probe parameters menu, operating parameters, serial interface parameters, IEEE-488 parameters, calibration parameters

Accessories:

CAL-3236	:	insert block blank
CAL-3237	:	insert block A
CAL-3238	:	insert block B
CAL-3239	:	insert block C
CAL-3240	:	extremely durable carrying case, ideal for transport, when recalibration is required
CAL-3236 / ..	:	insert user specified insert
CAL-3235	:	software package for Windows 95



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 850
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet : <http://www.thermo-electric.nl>

J/563r