
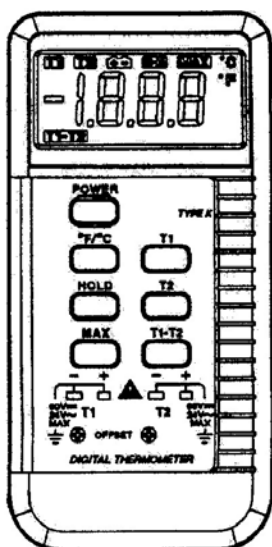


MINI Digital Indicator

digital thermometer, one or two input's

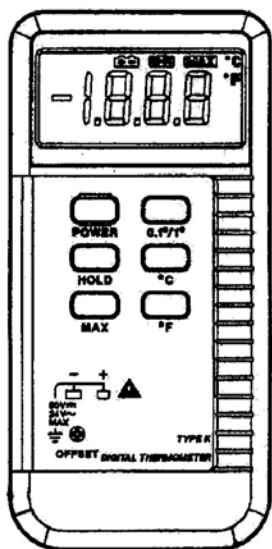

Features:

- Quick response
- Small size
- Clear display
- Light weight
- Easy connection
- Not expensive

More features see overleaf

Applications:

Ideal for temperature measurement in automotive services & repair, agricultural & horticulture, heating, ventilation & air-conditioning and industrial maintenance.

Easy to use, only one switch.

Specifications:

Model	: TE-3003 and TE 3004
Input	: thermocouple K, single or dual
Connection	: miniature connector
Display range	: -50 °C to 1300 °C
Resolution	: 0,1°C or 1,0°C,
Accuracy error for TE-3003	: $\pm(0,3\% \text{ rdg} + 1^\circ\text{C})$ -50 to 1000°C $\pm(0,5\% \text{ rdg} + 1^\circ\text{C})$ 1000 to 1300°C
Accuracy error for TE-3004	: $\pm(0,3\% \text{ rdg} + 1^\circ\text{C})$ 0 to 1000°C $\pm(0,5\% \text{ rdg} + 1^\circ\text{C})$ 1000 to 1300°C for T1-T2 the accuracy $\pm 0,5\%$. T1-T2 reading $+2^\circ\text{C}$ or $\pm 0,5\%$.
Ambient temp. operating range	: 0 °C to +50 °C
Switches	: on/off slide switch
Power	: standard 9 V (neda 1604, IEC 6F22) battery
Dimensions (L x W x D)	: 148 x 71 x 36 mm
Weight	: 210 g

Ordering code:

Standard switch to °F unit .

Type : TE-3003 for single Thermocouple

Type : TE-3004 for dual Thermocouple

ACCESSORIES: see reverse side

For standard probes see datasheet K/145



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 850
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet : <http://www.thermo-electric.nl>

K/140