


SCREWED BAR STOCK THERMOWELLS

with parallel stem

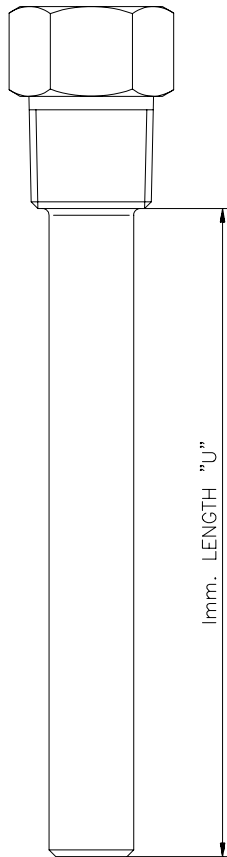

Specifications:

Series	:	TWE-10.000
Type	:	screwed, straight, made from solid bar stock
Material	:	SS 304 or SS 316
Internal thread	:	1/2" NPT
External thread	:	3/4" NPT
Hex size	:	32 mm (3/4" NPT) 36 mm (1" NPT)
Stem diameter	:	19 mm ^{+0.5} ₋₀
Surface finish	:	1 μm (40 Ru)
Bore	:	7 mm or 10 mm ^{+0.1} _{-0.1}
Eccentricity	:	10% of wall thickness max.
Tip thickness	:	4 mm ^{+1.5} ₋₀
Immersion length 'U'	:	to be specified; replace box in ordering code with your required length
Total well length	:	'U' plus 45 mm

Test wells can be supplied with brass or stainless steel plug and chain; please specify when ordering.

Ordering code:

Process connection	Bore ø	SS 304	SS 316
3/4" NPT	7 mm	TWE-11701 -□ mm 'U'	TWE-11702 -□ mm 'U'
3/4" NPT	10 mm	TWE-11011 -□ mm	TWE-11012 -□ mm
1" NPT	7 mm	TWE-12701 -□ mm	TWE-12702 -□ mm
1" NPT	10 mm	TWE-12011 -□ mm	TWE-12012 -□ mm



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 850
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet: http://www.thermo-electric.nl

A/410
Rev.00 08/03