


CODE KEY

instrument wire

Example:

P	/ AL	P	W	P	TW -	16F	-	BX	(triad)	600V
1	2	3	4	5	6	7	8	9	10	

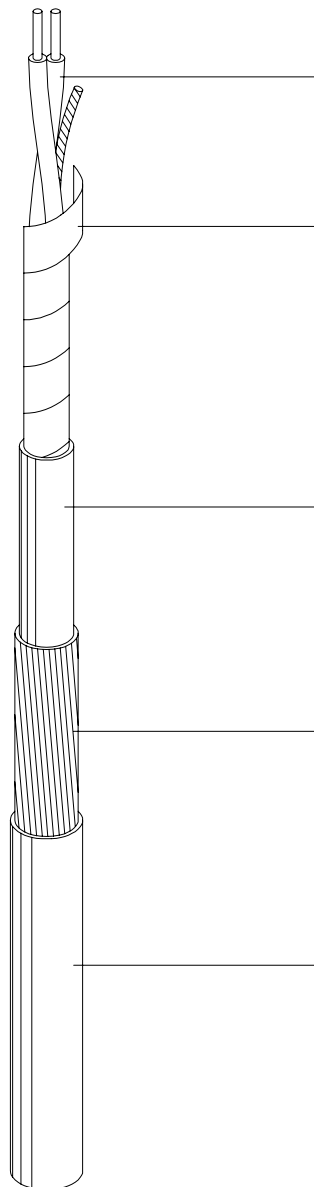

- 1** Conductor insulation PVC (P) or (UP)
PVC/Nylon for 600V (UPN)
- 2** Overall shield + drain wire
- 3** PVC inner jacket (optional)
- 4** Galvanized steel wire armour (optional)
- 5** PVC outer jacket
- 6** Twisted conductors
- 7** Conductor size in AWG (F for multi-stranded)
- 8** Copper conductors (paired)
- 9** Triad - to be specified when required
- 10** 600V - to be specified when required (300V standard rating)

