


HAND HELD DRY WELL CALIBRATOR

low-temp, -10 °C to 122 °C

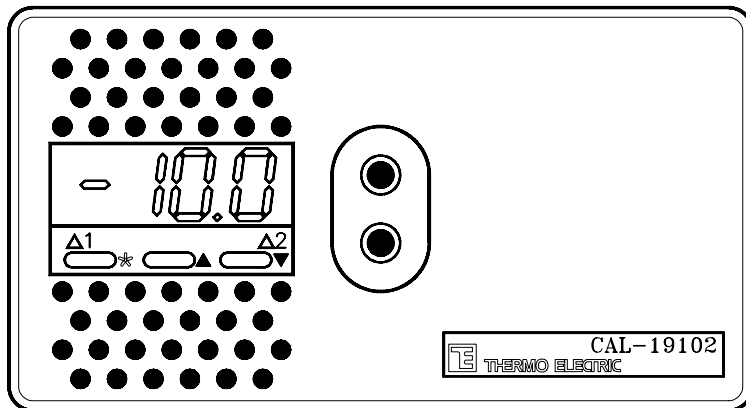

Features:

- Hand held
- Light weight
- Two wells for comparison calibration
- 0,1 °C resolution
- Microprocessor based

Applications:

Ideal to check dial gauges, digital thermometers, bulb switches and other sensors that needs calibration below ambient.

Specifications:

Model	: CAL-9102
Temperature range	: -10 °C to 122 °C (-10 °F to 251 °F)
Display resolution	: 0,1 °C (or °F)
Display	: LED, 14 mm high green LED's, 4 digits
Accuracy	: ± 0,5 °C from -10 to +100 °C ± 1,0 °C from 100 to 122 °C ± 2 °C holes greater than 6,35 mm
Stability	: ± 0,2 °C
Heating time	: 10 minutes, ambient to 100 °C
Stabilization	: 5 minutes
Cooling time	: 6 minutes, ambient to 0 °C
Wells	: 2 piece 12,7 mm wells with removable inserts
Insertion length	: 102 mm
Inserts	: 6,4 and 4,8 mm included, optional 1,6, 3,2, 8, 9,5 and 11 mm
Usage position	: horizontal
Enclosure	: rugged aluminium
Dimensions	: 83 x 153 x 172 mm (H x W x D)
Weight	: 1,8 kg.
Power supply	: 90 to 264 V AC (or 12 V DC, 3 A external input)

Ordering code:

CAL - 9102

ACCESSORIES: see reverse side



Thermo Electric
P.O. Box 179
2740 AD Waddinxveen
The Netherlands

Tel. : +31 (0)182 – 302 850
Fax : +31 (0)182 – 302 777
E-mail : info@thermo-electric.nl
Internet : <http://www.thermo-electric.nl>

J/507
Rev.00 08/03