


# PIPE CLAMP ADAPTERS

for spring loaded thermocouples

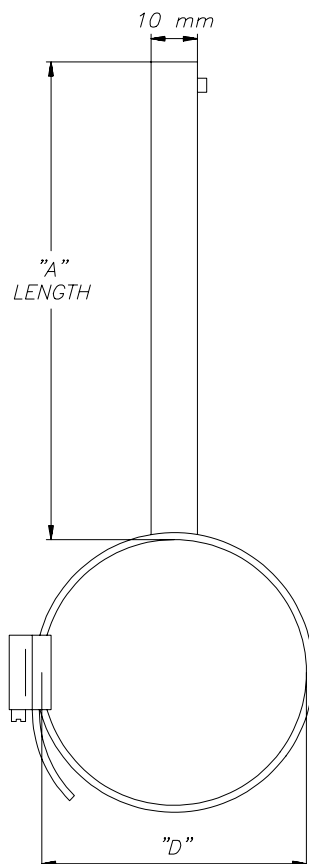

## Specifications:

|                           |   |                                                                                                                                                                                         |
|---------------------------|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                  | : | stainless steel with zinc plated worm gear                                                                                                                                              |
| Length 'A'                | : | to be specified; replace box in ordering code with your required length; our standard lengths are 50 mm, 100 mm and 150 mm ('A' length measured from top of adapter to surface of pipe) |
| Max. insulation thickness | : | 'A' length minus 15 mm                                                                                                                                                                  |
| Pipe diameter 'D'         | : | see ordering code                                                                                                                                                                       |
| Mounting method           | : | place opened clamp around pipe, stick band-end into worm gear housing and tighten with screw driver;<br>for even faster response, pipe wall can be spot drilled with a 7 mm drill       |
| Thermocouple              | : | see datasheet B/500 for types; immersion length 'A' to be specified (equal to 'A' length of adapter)                                                                                    |

Other 'A' length or pipe diameter also available

## Ordering code:

| Pipe diameter 'D' |        | Ordering code  |
|-------------------|--------|----------------|
| Min.              | Max.   |                |
|                   |        | 'A'            |
| 20 mm             | 32 mm  | MTS-93025-□ mm |
| 32 mm             | 50 mm  | MTS-93040-□ mm |
| 50 mm             | 70 mm  | MTS-93060-□ mm |
| 70 mm             | 90 mm  | MTS-93080-□ mm |
| 90 mm             | 110 mm | MTS-93100-□ mm |
| 110 mm            | 140 mm | MTS-93125-□ mm |
| 145 mm            | 180 mm | MTS-93160-□ mm |



**Thermo Electric**  
**P.O. Box 179**  
**2740 AD Waddinxveen**  
**The Netherlands**

Tel. : +31 (0)182 – 302 850  
 Fax : +31 (0)182 – 302 777  
 E-mail : [info@thermo-electric.nl](mailto:info@thermo-electric.nl)  
 Internet : <http://www.thermo-electric.nl>

**B/515**  
**Rev.00 08/03**